



19" LCD monitor with LED-backlit and protective glass

The ProLite P1905S meets the increasing demands for Protected LCD's within Education, Retail and Industrial applications. In addition to having toughened safety glass fitted behind the bezel at 8H hardness rating capable of resisting above normal impacts to the display, iiyama have enhanced the range to include the latest high performance and energy saving technology. Features include 5msec response time, 1000:1 contrast ratio enhancing colour and Analogue and DVI inputs.



PROTECTIVE GLASS

The toughened safety glass fitted behind the bezel at 8H hardness rating is capable of resisting above normal impacts to the display making this LCD the ideal choice for Education, Retail and Industrial applications.



LED-BACKLIT

A typical CCFL LCD uses four backlight lamps. Using LED diodes considerably lowers the power consumption and reduces the CO2 emission into the environment making this LCD a true ECO-Friendly product.

1. DISPLAY CHARACTERISTICS

DIAGONAL

19"; 48cm

ASPECT RATIO	5 : 4
PANEL	TN LED, matte finish
NATIVE RESOLUTION	1280 x 1024 (1.3 megapixel)
BRIGHTNESS	240 cd/m² typical
BRIGHTNESS	300 cd/m² max.
CONTRAST	1000 : 1 typical
RESPONSE TIME	5 ms
VIEWING ZONE	horizontal/vertical: 170° / 160° ; right/left: 85° / 85° ; up/down: 80° / 70°
DISPLAY COLOUR	16.7 million
GLASS THICKNESS	2 mm
GLASS TRANSMISSION RATE	96% up typical
GLASS HARDNESS	8H minimum
DISPLAY AREA H X W	301 x 376.3 mm; 11.9" x 14.8"
VIEWING ZONE CR>5	horizontal/vertical: 170° / 170° ; right/left: 85° / 85° ; up/down: 85/ 85°
PIXEL PITCH H X V	0.294 x 0.294 mm
HORIZONTAL SYNC	30 - 80kHz
VERTICAL SYNC	55 - 75Hz
SYNCHRONIZATION	Separate Sync

2. INTERFACES & CONNECTORS

ANALOG INPUT CONNECTOR	VGA
DIGITAL INPUT CONNECTOR	DVI-D
HDCP	yes;

3. FEATURES

APPLE - MAC	All iiyama monitors are compatible with Apple-Macintosh computers.
PLUG & PLAY	VESA DDC2B™
CONTROLS	Via OSD in 9 languages (EN, FR, DE, NL, PL, RU, JP, Chinese - traditional and simplified) and 5 front controls (Power, Select / Input, Scroll up / Audio, Scroll down / i-Style Colour, Menu)
USER CONTROLS	auto image adjust, picture adjust (contrast, brightness, ACR, ECO), input select, audio adjust (volume, mute), colour adjust, information, manual image adjust (H/V position, clock, phase, sharpness), setup menu (language select, OSD position, OSD timeout, OSD background, opening logo, LED), memory recall
SPEAKERS	2 x 1 W (Stereo)
ANTI-THEFT-DEVICE	Kensington-lock™ prepared
CERTIFICATES	CE, TÜV-GS, CU
TILT ANGLE	20° up; ° down
VESA MOUNTING	100 x 100 mm
COLOUR	Black

4. ACCESSORIES


DRIVER	Windows 95/98/2000/ME/XP/Vista/7/8
INCLUDED ACCESSORIES	power cable, VGA cable, DVI-D signal cable, audio cable, stand, quick start guide, safety guide

5. POWER MANAGEMENT

POWER SUPPLY	AC 100 - 240 V, 50 / 60 Hz
POWER SUPPLY UNIT	internal
POWER USAGE	16 W typical; max. 0.5 W in Power management mode
POWER MANAGEMENT	VESA DPMS, ENERGY STAR®

6. DIMENSIONS & WEIGHT

DIMENSIONS W X H X D	414.5 x 420.5 x 200.5 mm
WEIGHT	4.6 kg

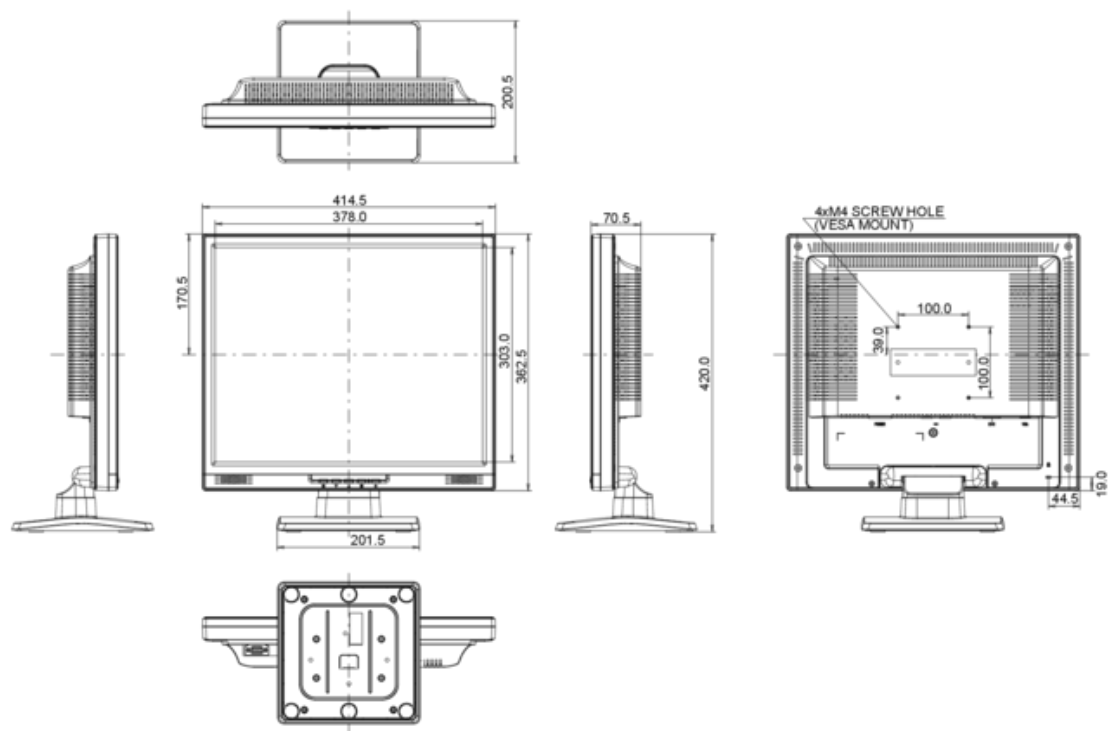

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.